MEMO

State of Idaho
Department of Water Resources
322 E Front Street, P.O. Box 83720, Boise, Idaho 83720-0098
Phone: (208) 287-4800 Fax: (208) 287-6700

Date: March 28, 2022
To: Shelley Keen, Water Allocation Bureau Chief
Cc: Sean Vincent, P.G., Hydrology Section Manager
From: Jennifer Sukow, P.E., P.G., Hydrology Section
Subject: Cumulative review of ESPA transfers between 2012 and 2021

The Idaho Department of Water Resources (IDWR) previously analyzed and documented the cumulative effect of water right transfers involving pumping from the Eastern Snake Plain aquifer (ESPA). The most recent analysis included water right transfers approved between January 1, 2012 and September 30, 2020 (Sukow, 2021)[1]. This memorandum presents the results of an updated cumulative review including water right transfers processed between January 1, 2012 and September 30, 2021.

Water Allocation Bureau staff identified 71 transfers approved between October 1, 2020 and September 30, 2021 involving PODs located within the Eastern Snake Plain Aquifer Model Version 2.2 (ESPAM2.2) boundary. For each transfer, Water Allocation Bureau staff assigned "TO" and "FROM" well locations to a model row and column. For transfers involving a well location outside of the active model boundary, the well location was assigned the model row and column of the nearest active model cell. Water Allocation Bureau staff also provided an annual pumping volume for each well. Figure 1 shows the locations of model cells with TO and FROM wells representing the 71 recently approved transfers. Figure 2 shows the cumulative change in annual pumping volume by model cell for the recently approved transfers.

[1] Sukow, J., 2021. *Cumulative review of ESPA transfers between 2012 and 2020*, Idaho Department of Water Resources, memorandum to Shelley Keen dated April 1, 2021, 15 p., https://idwr.idaho.gov/wp-content/uploads/sites/2/water-rights/Cumulative-Review-of-ESPA-Transfer-between-2019-2020.pdf.

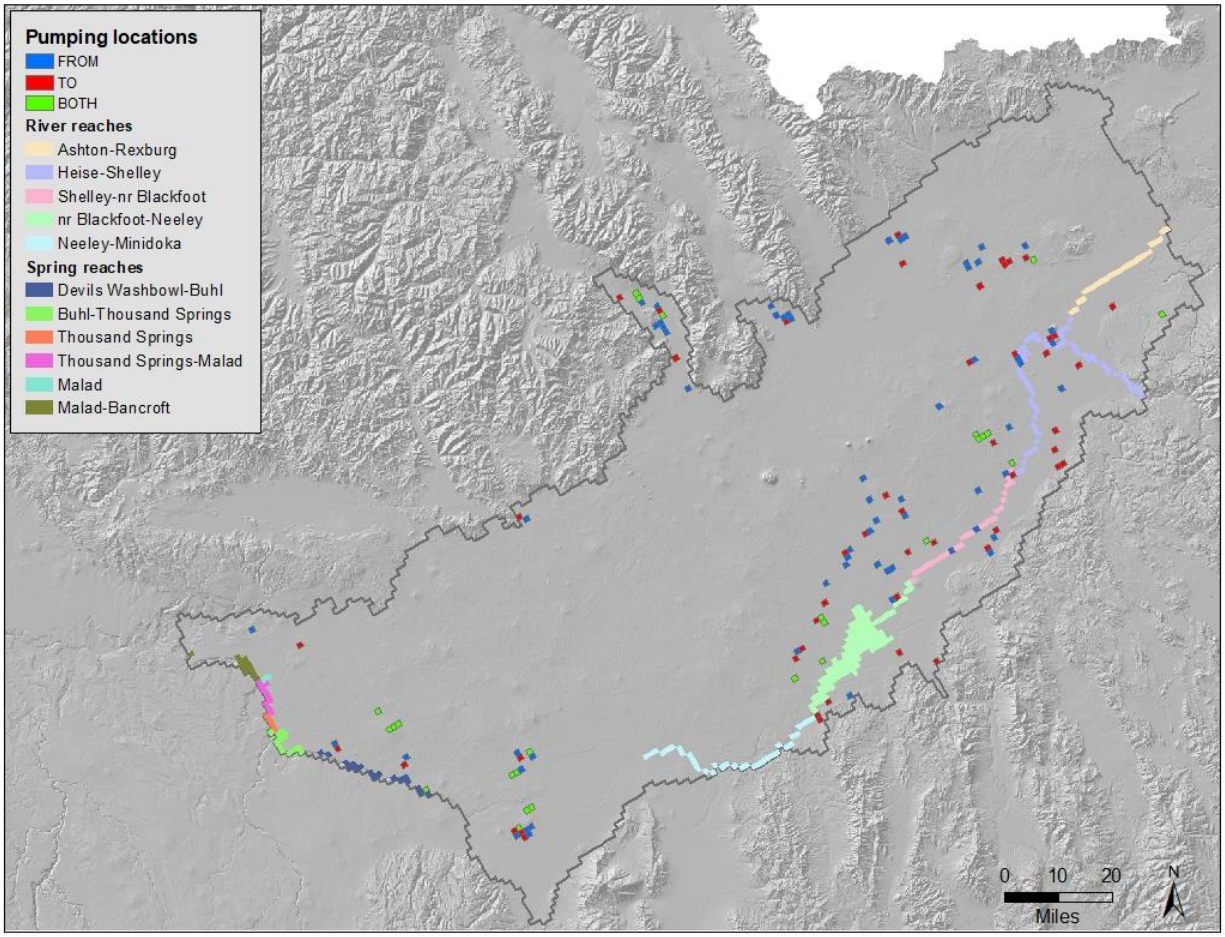

Figure 1. Locations of TO and FROM wells for transfers approved between October 1, 2020 and September 30, 2021

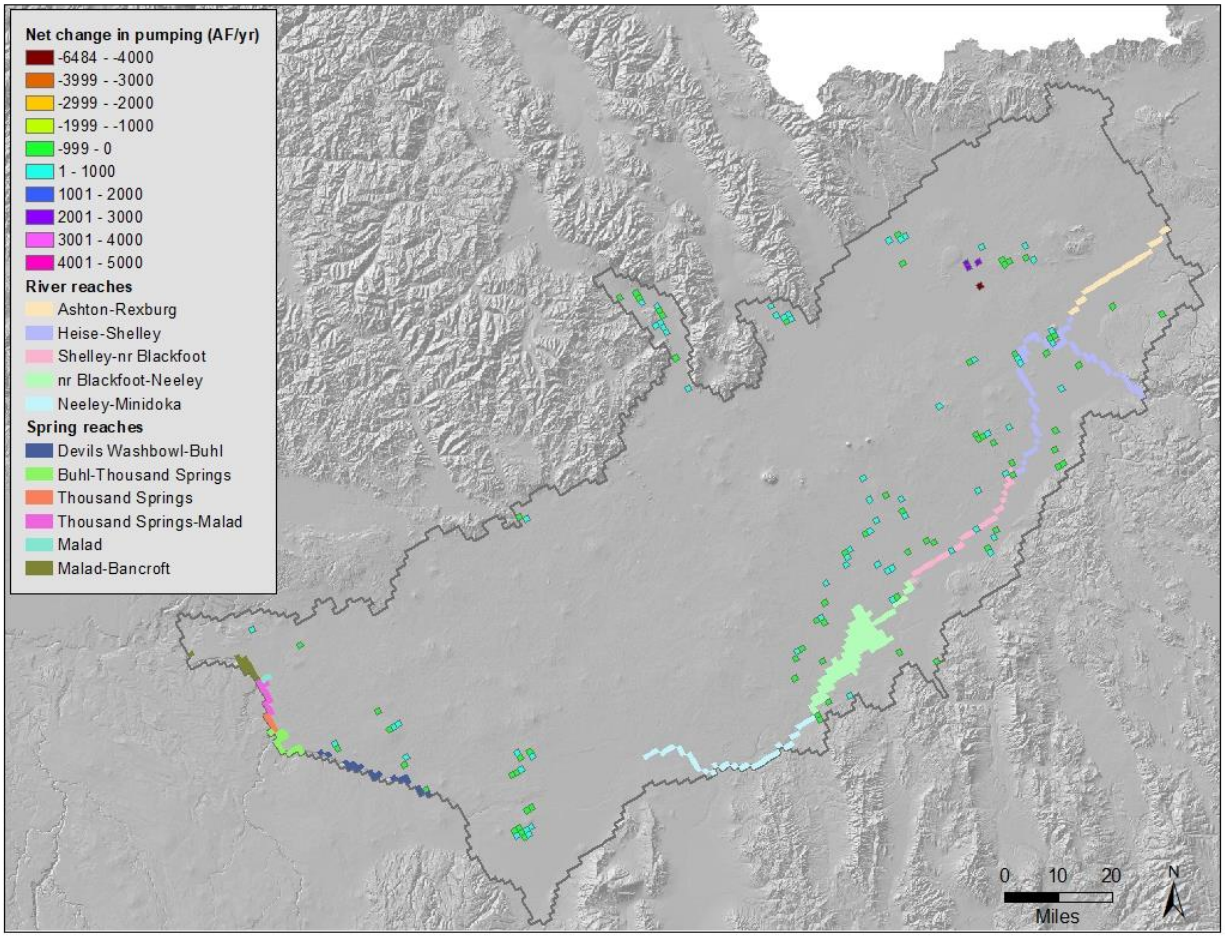

Figure 2. Net change in pumping resulting from transfers approved between October 1, 2020 and September 30, 2021

For the cumulative review, changes in pumping resulting from the recently approved transfers were added to changes in pumping resulting from the 551 transfers analyzed previously in Sukow (2021). The updated analysis includes a total of 622 transfers. Figure 3 shows the locations of model cells with TO and FROM wells representing the transfers approved between January 1, 2012 and September 30, 2021. Figure 4 shows the cumulative change in annual pumping volume by model cell for these transfers.

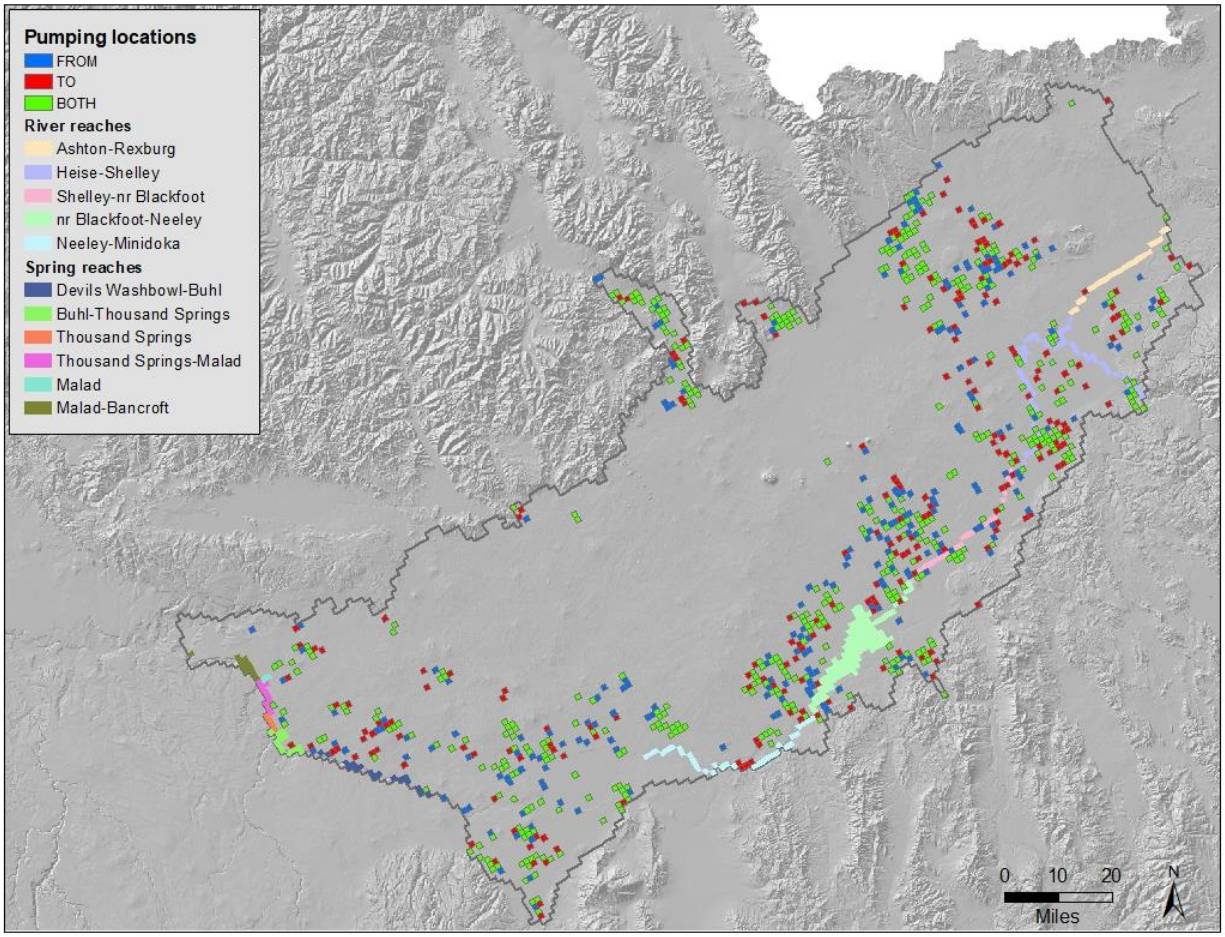

Figure 3. Location of TO and FROM wells for transfers approved between January 1, 2012 and September 30, 2021

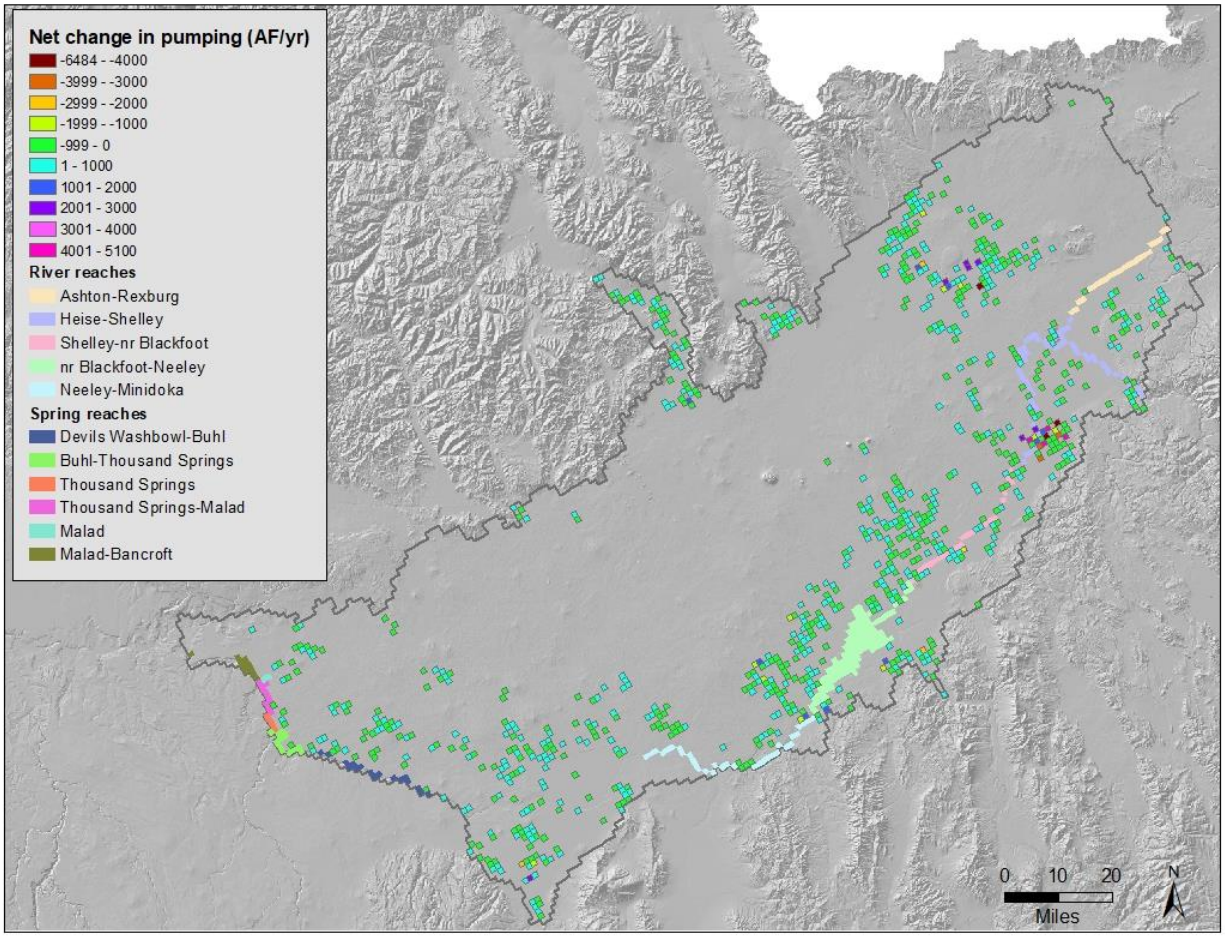

Figure 4. Net change in pumping resulting from transfers approved between January 1, 2012 and September 30, 2021

Most transfers involve relatively small amounts of water (Figure 5) or move points of diversion a relatively short distance (Figure 6). Figure 7 shows the cumulative volume of water transferred by the average distance between TO and FROM wells.

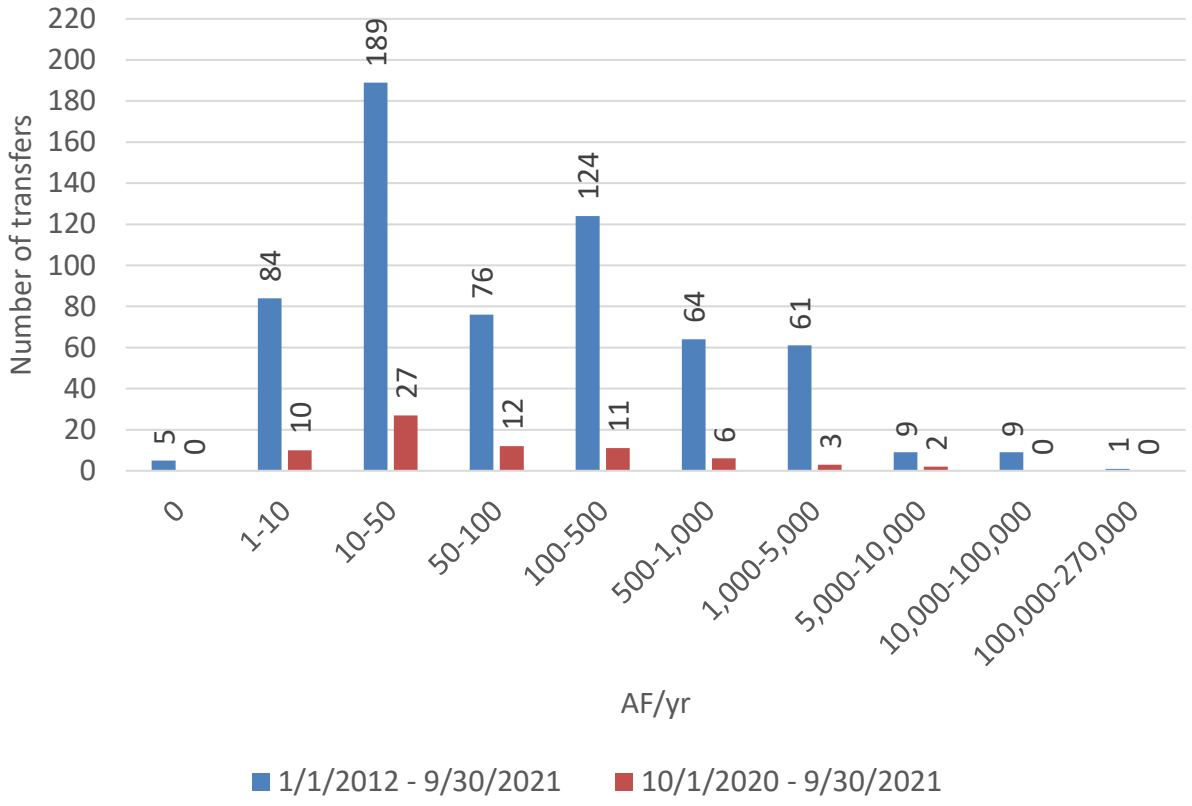

Figure 5. Transfer pumping volume

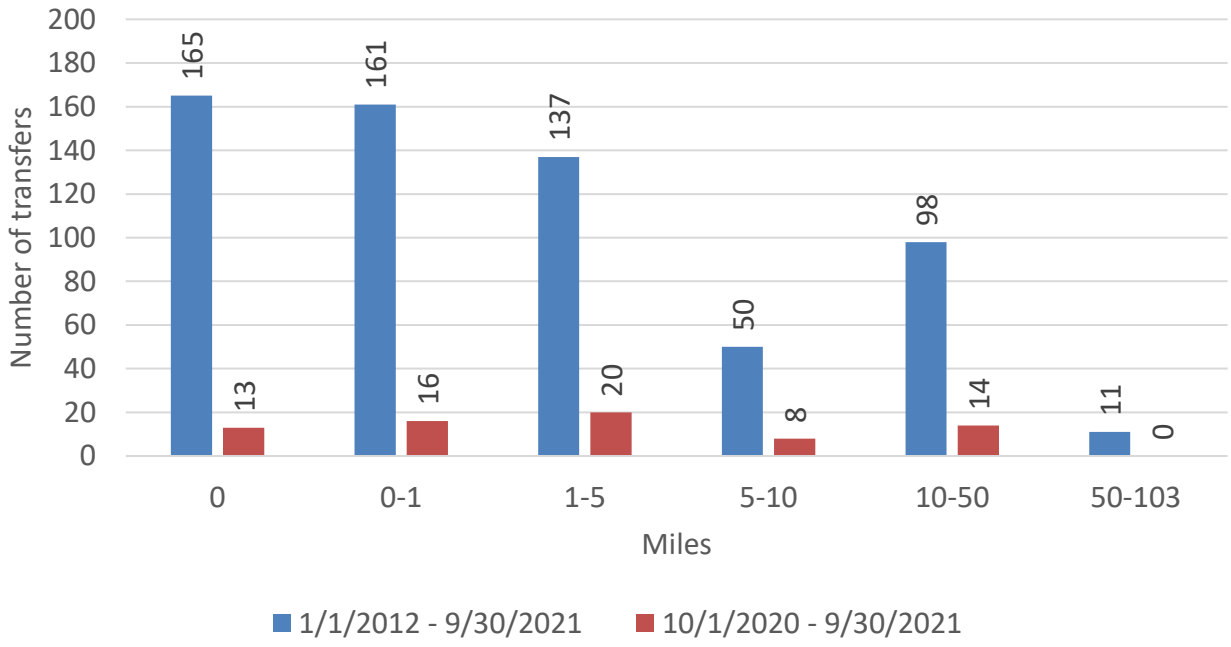

Figure 6. Average distance between TO and FROM wells

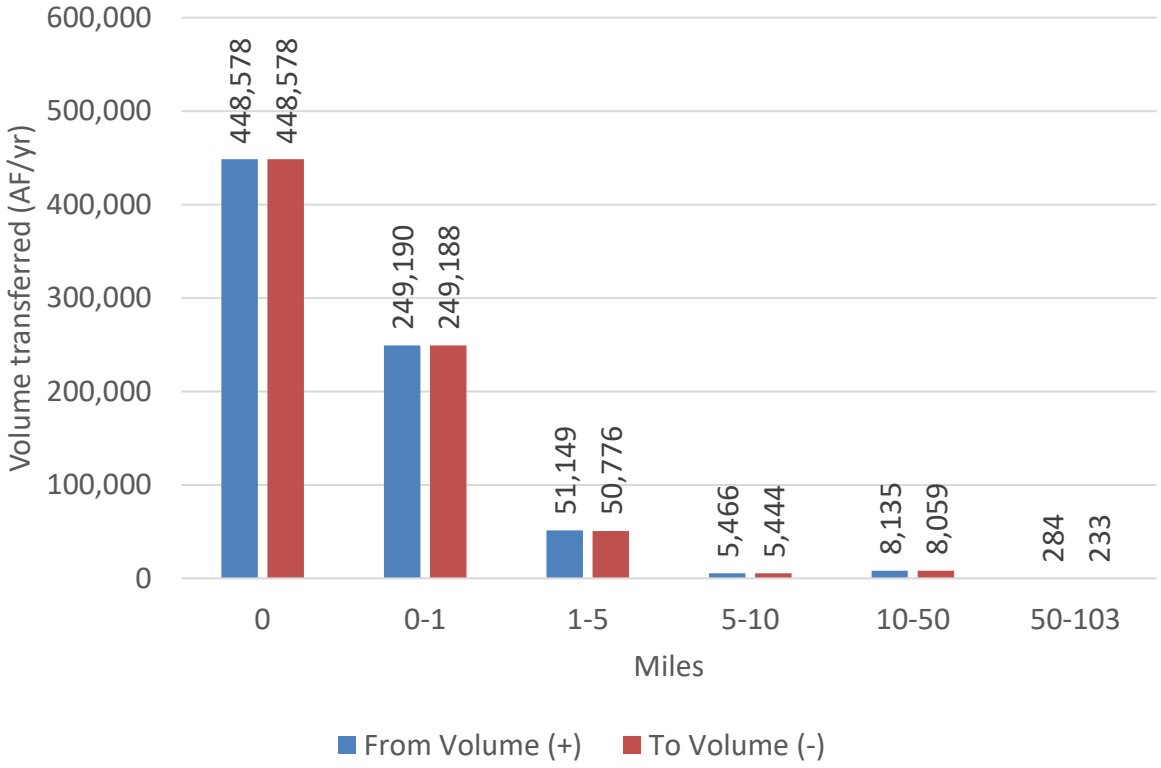

Figure 7. Cumulative volume transferred by distance transferred (1/1/2012 – 9/30/2021)

IDWR finalized model documentation for Version 2.2 of the Eastern Snake Plain Aquifer Model (ESPAM2.2) in May 2021 and Version 2.1 (ESPAM2.1) has been superseded by the new version. The effects of changing model versions on the results of the annual ESPA cumulative transfer review were discussed in the water year 2020 update report (Sukow, 2021) and were found to be minimal. For the water year 2021 analysis, ESPAM2.2 was used to simulate the cumulative effects of the transfers on steady-state reach gains in eleven reaches of the Snake River (Figure 4). The eleven reaches are equivalent to the reaches represented in the ESPA Model Transfer Spreadsheet (ETRAN), which is commonly used as a tool by transfer applicants and IDWR to analyze the hydrologic impacts of individual transfers. ETRAN simulates the effects of changes in pumping location using the ESPAM2.2 groundwater flow model, but the ETRAN user interface only supports the simulation of a limited number of points of diversion. Because the cumulative analysis requires simulation of a large number of points of diversion, ESPAM2.2 was used with other pre- and post-processing tools to perform the analyses.

Transfer data provided by Water Allocation Bureau staff were reformatted to create MODFLOW input files. FROM wells were represented as a positive stress to simulate a decrease in pumping

at these locations. TO wells were represented as a negative stress to simulate an increase in pumping at these locations. The superposition version of ESPAM2.2 was used to simulate the effects of the changes in pumping at steady state.

The cumulative effect of changes in pumping on reach gains in each of the eleven reaches of the Snake River was extracted from the model output. Results are summarized in Table 1. Changes in reach gains resulting from the transfers are very small compared to average reach gains (less than +/- 1.5%). The largest changes are an increase of 1,633 AF/yr (2.3 cfs) in the near Blackfoot to Neeley reach and a decrease of 886 AF/yr (-1.2 cfs) in the Neeley to Minidoka reach.

Table 1. Cumulative effect of transfers approved between January 1, 2012 and September 30, 2021 on reach gains in the Snake River

Reach	Transfer Impact		Average Reach Gain[2]		% change in reach gain
	(AF/yr)	(cfs)	(AF/yr)	(cfs)	
Ashton-Rexburg	241	0.33	-19,756	-27	1.22%
Heise-Shelley	-331	-0.46	-214,459	-296	-0.15%
Shelley-Near Blackfoot	-224	-0.31	-400,694	-553	-0.06%
Subtotal above nr Blackfoot	-314	-0.43	-634,908	-876	-0.05%
Near Blackfoot-Neeley	1,633	2.25	1,720,822	2,375	0.09%
Neeley-Minidoka	-886	-1.22	71,706	99	-1.24%
Subtotal nr Blackfoot-Minidoka	747	1.03	1,792,528	2,474	0.04%
Devil's Washbowl -Buhl	-4	0.00	787,690	1,087	0.00%
Buhl-Thousand Springs	7	0.01			
Thousand Springs	14	0.02			
Thousand Springs-Malad	19	0.03			
Malad	47	0.06			
Malad-Bancroft	9	0.01			
Subtotal Kimberly-King Hill	92	0.13	4,248,456	5,864	0.00%
Total	525	0.72	5,406,075	7,462	0.01%

[2] Average reach gains were calculated from data compiled for development of ESPAM2.2 for water years 1981 through 2018.

Figure 8 shows the trend in the cumulative effect of transfers approved on or after January 1, 2012 on reaches of the Snake River above Minidoka. For reaches of the Snake River above the near Blackfoot gage, there is not an apparent trend in the cumulative effect of the transfers. For these reaches, the cumulative effect of transfers approved during a given year resulted in increases in reach gains for some years and decreases in reach gains for other years. For the near Blackfoot to Neeley reach, the cumulative effect of the transfers approved during a given year has resulted in a very small increase in reach gains for most years. For the Neeley to Minidoka reach, the cumulative effect of the transfers approved during a given year has resulted in a very small decrease in reach gains for most years. The cumulative effect on the combined near Blackfoot to Minidoka reach has been a very small increase in reach gains for most years.

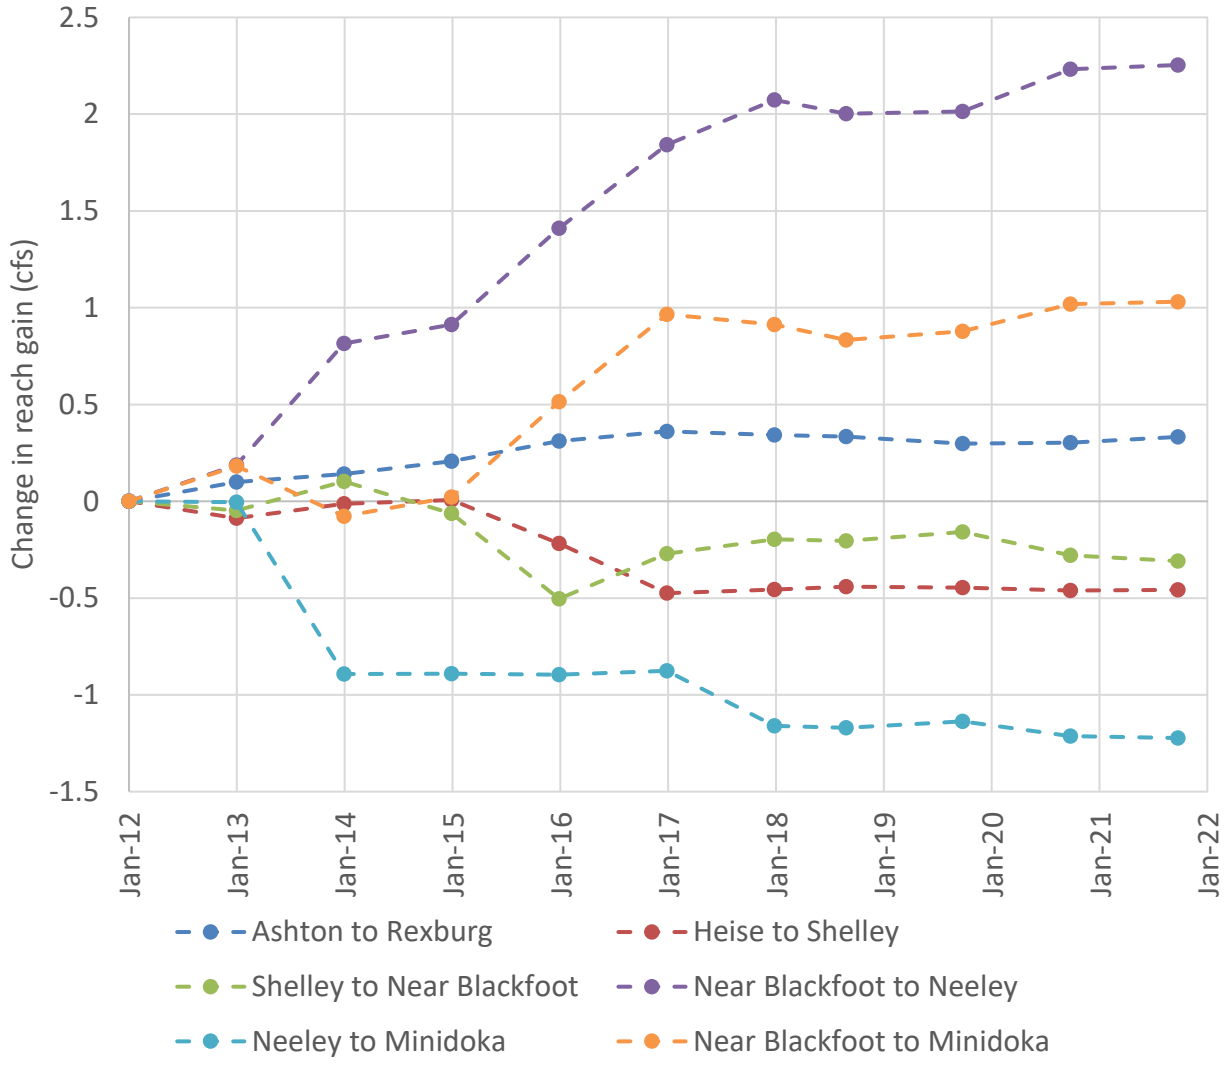

Figure 8. Trend in cumulative effect of transfers approved on or after January 1, 2012 on reaches of the Snake River above Minidoka

Figure 9 shows the trend in the cumulative effect of transfers approved on or after January 1, 2012 on reaches of the Snake River between Kimberly and King Hill. For reaches between Kimberly and King Hill, the cumulative effect of transfers approved during a given year resulted in increases in reach gains for some years and decreases in reach gains for other years. The effect on the Devil's Washbowl to Buhl reach has been a very small decrease in reach gains for four of the ten years. The effect on the Buhl to Thousand Springs reach has been a very small decrease in reach gains for six of the ten years. The total effect on the Kimberly to King Hill reach has been a very small decrease in reach gains for five of the ten years and a very small increase for five of the ten years.

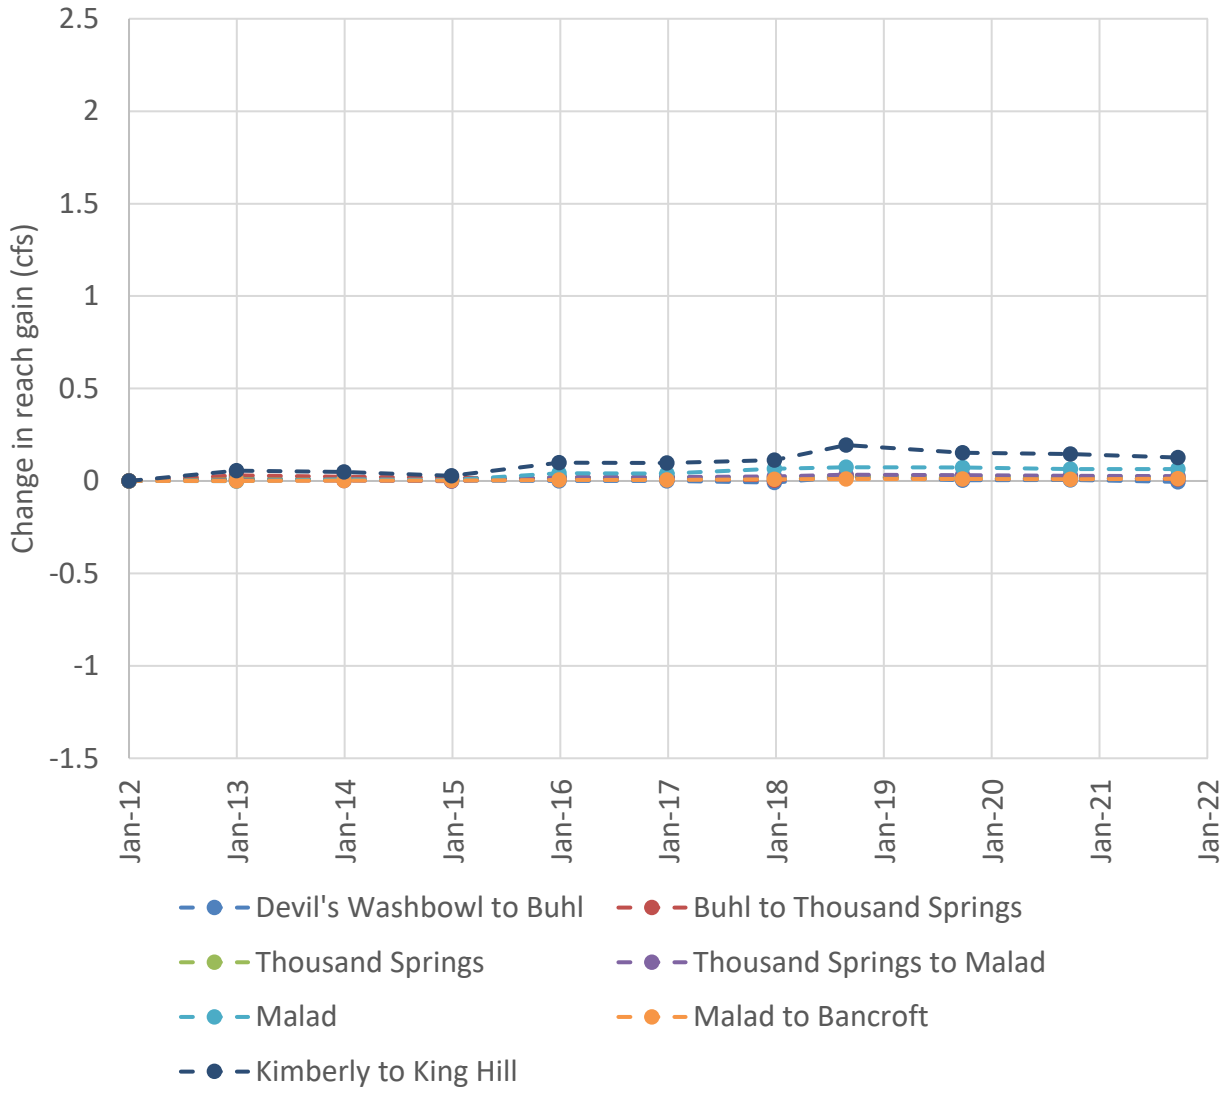

Figure 9. Trend in cumulative effect of transfers approved on or after January 1, 2012 on reaches of the Snake River between Kimberly and King Hill

Of the 622 transfers included in the cumulative analysis, 296 transfers had an average distance of greater than 1.0 mile between the TO and FROM model cell locations (Figure 10). The cumulative effects of these 296 transfers were simulated using the superposition version of ESPAM2.2. Results of the simulation are summarized in Table 2. The results are similar to the results of the simulation that included all of the transfers. Changes in reach gains resulting from the transfers are very small compared to average reach gains (less than +/- 1.5%). The largest changes are an increase of 1,056 AF/yr (1.5 cfs) in the near Blackfoot to Neeley reach and a decrease of 721 AF/yr (-1.0 cfs) in the Neeley to Minidoka reach.

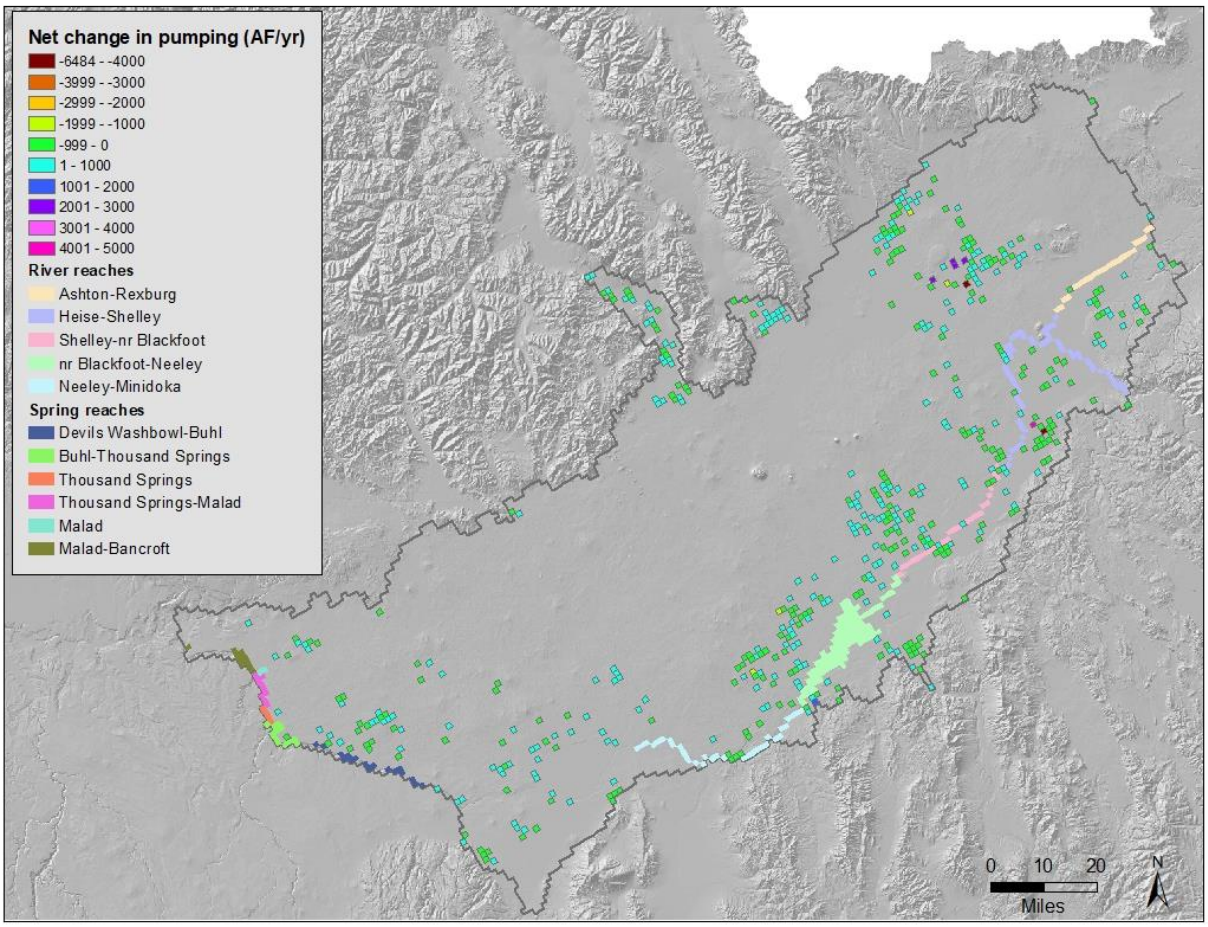

Figure 10. Net change in pumping resulting from transfers with an average distance of greater than one mile (approved between January 1, 2012 and September 30, 2021)

Table 2. Cumulative effects of transfers with an average distance greater than one mile on reach gains in the Snake River (for transfers approved between January 1, 2012 and September 30, 2021)

Reach	Transfer Impact		Average Reach Gain		% change in reach gain
	(AF/yr)	(cfs)	(AF/yr)	(cfs)	
Ashton-Rexburg	124	0.17	-19,756	-27	0.63%
Heise-Shelley	-26	-0.04	-214,459	-296	-0.01%
Shelley-Near Blackfoot	33	0.05	-400,694	-553	0.01%
Subtotal above nr Blackfoot	132	0.18	-634,908	-876	0.02%
Near Blackfoot-Neeley	1,056	1.46	1,720,822	2,375	0.06%
Neeley-Minidoka	-721	-1.00	71,706	99	-1.01%
Subtotal nr Blackfoot-Minidoka	335	0.46	1,792,528	2,474	0.02%
Devil's Washbowl -Buhl	-12	-0.02	787,690	1,087	0.00%
Buhl-Thousand Springs	3	0.00			
Thousand Springs	9	0.01			
Thousand Springs-Malad	14	0.02			
Malad	36	0.05			
Malad-Bancroft	7	0.01			
Subtotal Kimberly-King Hill	57	0.08	4,248,456	5,864	0.00%
Total	523	0.72	5,406,075	7,462	0.01%